


7400 / 7400XL

“Our 7 year old Safety Speed Panel Saw has ripped in excess of 6 million feet of plywood! The durability has been outstanding.”


—Ken Ervin, Flooring Services Ltd., Farmer's Branch, TX

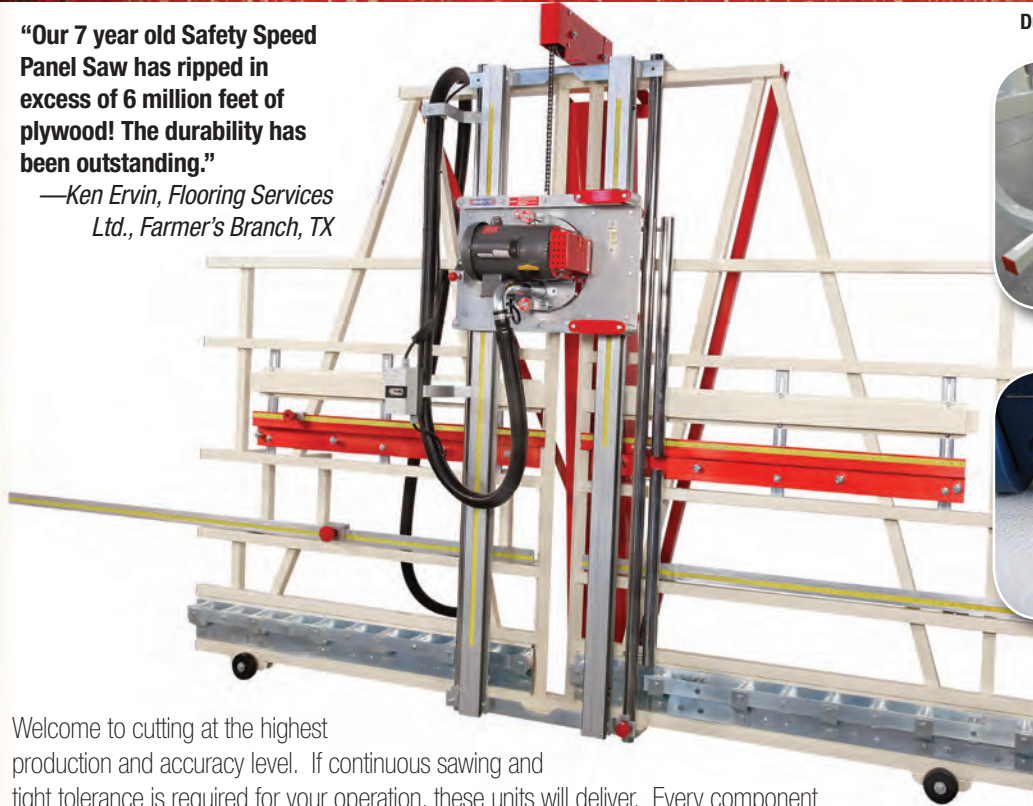

Dual V-track & Bearing



New Frame Design



Scoring System

Welcome to cutting at the highest production and accuracy level. If continuous sawing and tight tolerance is required for your operation, these units will deliver. Every component of this saw represents quality and performance. Showcasing 3 Hp, 3~ heavy duty induction motors, heavy extruded beams with precise dual-vee bearings, and the sturdiest frame on the market, these powerhouse machines will deliver cutting accuracies to 0.0005" guaranteed. Add knife scoring to eliminate all chipping on panels.

STANDARD EQUIPMENT

- 3 Hp, 3~ continuous duty induction saw motor.
- Welded steel frame and integrated stand system.
- Dual V-track precision guide system.
- Adjustable vertical and horizontal rulers.
- Quick stop gauges (8' left, 5' right).
- Saw blade.

- Quick change from vertical to horizontal cutting.
- Floating pressure saw foot.
- Solid aluminum material rollers.
- Enclosed counterweight system.
- MID-WAY FENCE™.
- Dust collection ready.
- Hold down bar.
- Wheels.
- 3 year warranty.
- TUV certified to UL/CSA standards.

OPTIONAL EQUIPMENT

- Stop bar.
- Dust vacuum (1 Hp or 2 1/4 Hp).
- Digital readout for vertical cuts.
- High quality saw blades.
- Material scoring attachment.
- 2 Hp, 1 phase motor.
- SAWGEAR™ or TigerStop® auto length measuring.

SPECIFICATIONS		
Max. Crosscut	64"	1625mm
Max. Rip Cut	Unlimited	
Max. Cut Thickness	2 1/8"/55mm	
Cut Accuracy, Straight and Square	0.005"/.13mm	
Blade Diameter	8"/210mm	
Motor: Standard	3~230V, 7.6 amp	
Optional	1~220V, 11 amp	
Frame Length: 7400	120"/3050mm	
7400XL	156"/3950mm	
Shipping Weight: 7400	787 lbs/357 kg	
7400XL	1050 lbs/476 kg	

