




Abbeon Cal, Inc.


Industrial Plastic Working Equipment & Precision Instruments

PB

Panel Board
Mount

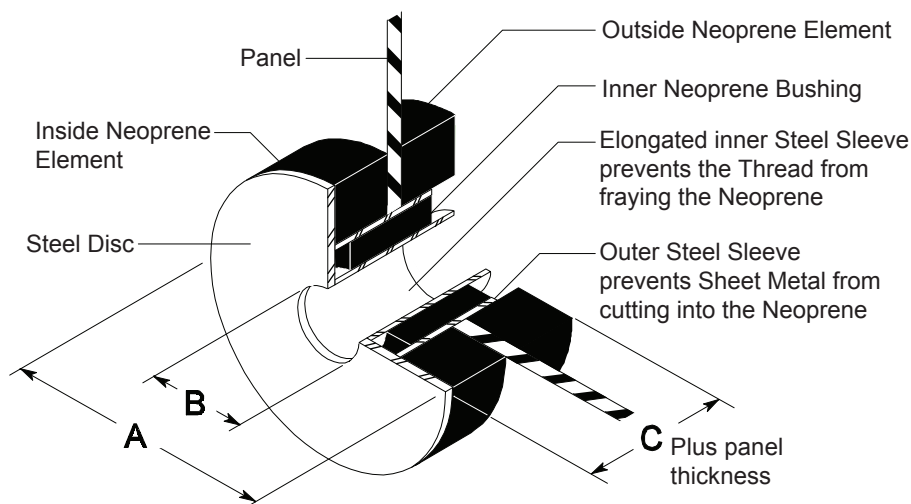

PB Mount with SAS
Seismic Anchor Stud

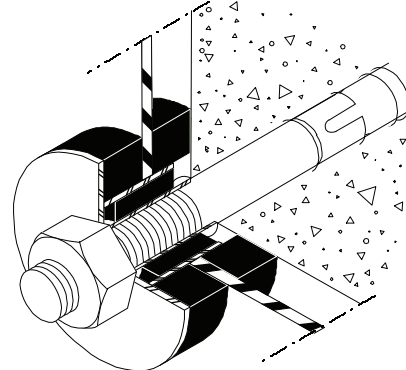

All Hardware is Electro-Galvanized

All Neoprene is Bridge Bearing Quality

TYPE PB CAPACITY and DIMENSIONS (inch)

Size	Rated Capacity (lbs)	A Dia. (in)	B Dia. (in)	C (in)	Hole Size to be drilled in Panel Board (in)	Bolt Dia. (in)
PB-150	20	1 1/2	5/16	3/4	1	1/4
PB-175	35	1 3/4	7/16	7/8	1 1/8	3/8
PB-225	75	2 1/4	9/16	1 1/8	1 1/4	1/2

TYPE PB CAPACITY and DIMENSIONS (mm)

Size	Rated Capacity (kg)	A Dia. (mm)	B Dia. (mm)	C (mm)	Hole Size to be drilled in Panel Board (mm)	Bolt Dia. (mm)
PB-150	9	38	8	19	25	6
PB-175	16	45	11	22	28	10
PB-225	32	57	14	28	31	13

BRIDGE-BEARING NEOPRENE SPECIFICATIONS

ORIGINAL PHYSICAL PROPERTIES			TESTING FOR AGING			COMPRES- SION SET		
(a)	(b)	(b)	(c)			(d)	(e)	
Duro- meter	Tensile Strength	Elongat. at Break	Oven Aging (70hrs/212° F)	Hard- ness	Tensile Strength	Elongat. at Break	100 ppm in air by Vol.20% Strain 100° F	22hrs/212° F Method B
	(min)	(min)	(max)	(max)	(max)	(min)		
40±5	2000 psi	450%	+ 15%	- 15%	- 40%		No Cracks	35% (max)
50±5	2250 psi	400%	+ 15%	- 15%	- 40%		No Cracks	35% (max)
60±5	2250 psi	350%	+ 15%	- 15%	- 40%		No Cracks	35% (max)

(a)ASTM2240 (b)ASTM D-412 (c)ASTM D-573 (d)ASTM D-1149 (e)ASTM D-395

Abbeon Cal, Inc.,

1363 Donlon Street Unit 1, Ventura, CA 93003-8387

800-922-0977 www.Abbeon.com

E-mail: abbeoncal@abbeon.com